


S45

A MEDIA GITTATA
Attacco 1" 1/2 BSP
Attacco 1" 1/2 NPT

MEDIUM THROW
1" 1/2 BSP Etching
1" 1/2 NPT Etching

TRAIETTORIA 25° o 28°
TRAJECTORY 25° or 28°

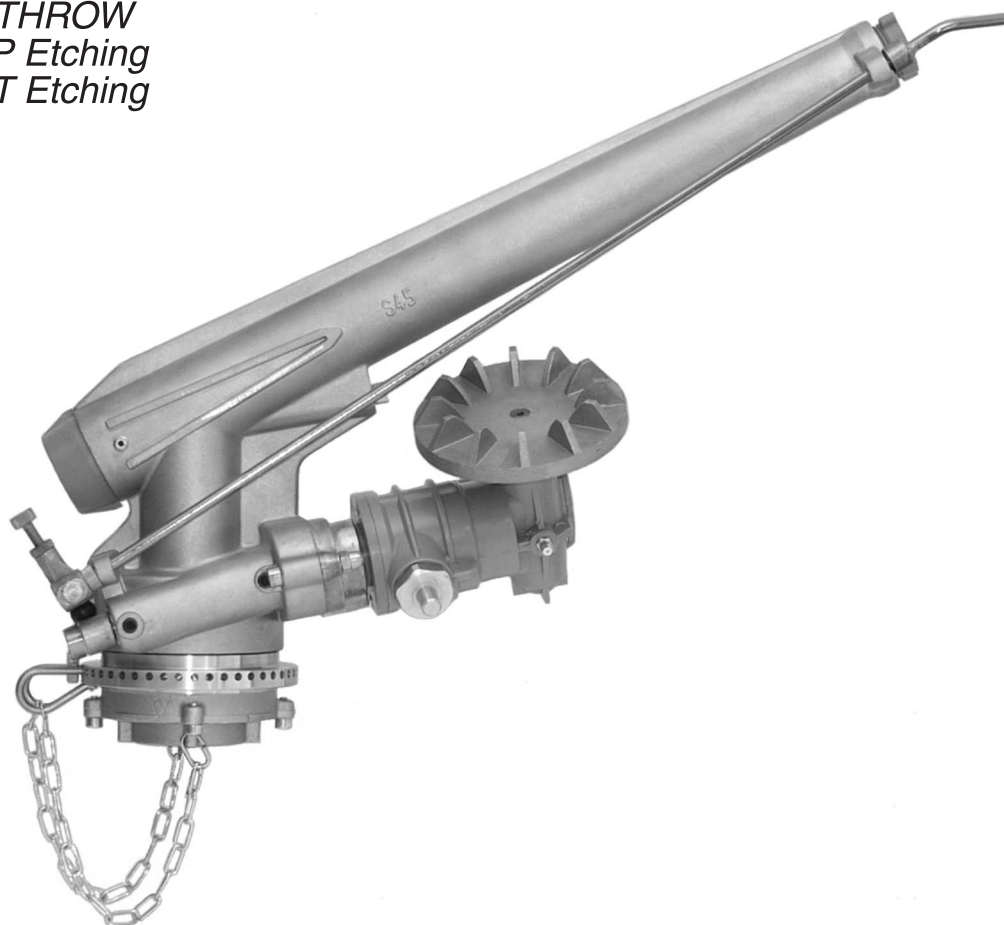

Boccaglio Nozzle Ø mm	Pressione Pressure atm.	Portata Discharge l/min	Gittata Length of jet m
10	1,5 - 2,0 - 2,5	80 - 93 - 104	18 - 22 - 24
12	2,0 - 3,0 - 4,0	134 - 164 - 190	24 - 29 - 31
14	2,0 - 3,0 - 4,0	183 - 224 - 258	26 - 32 - 34
16	3,0 - 4,0 - 5,0	292 - 337 - 377	33 - 37 - 39
18	3,0 - 4,0 - 5,0	370 - 427 - 477	34 - 37 - 42
20	3,0 - 4,0 - 5,0	456 - 527 - 590	36 - 41 - 46
22	4,0 - 5,0 - 6,0	638 - 713 - 780	42 - 47 - 49
24	4,0 - 5,0 - 6,0	730 - 817 - 895	43 - 48 - 52

I dati tecnici sono orientativi e non impegnativi
The technical characteristics are indicative and not binding